

VRCUTTM Ready TRIUMPH[®] 7260

28" programmable cutter with hydraulic clamp, power back gauge, touchpad control module, and IR safety light beams on front table.

Specifications

Cutting width	28"
Cutting height	3"
Narrow cut	3/4" (3 1/2*)
Length behind blade	28 3/8"
Electrical requirements	220 V, 3 phase
Motor output	2 hp
Dimensions (D x W x H)	60 1/2" x 51" x 52 1/2" ¹
Shipping weight	1,534 ² lbs.

*with false clamp

¹depth and width of side table is 63" and 82 1/2"

² shipping weight with side tables is 1,622 lbs.



VRCut is a groundbreaking software solution designed to automate the cutting workflow by promoting an efficient and error-free cutting process from start to finish. VRCut intelligently bridges the gap between pre-press and the finishing process, allowing operators of any experience level the ability to cut with confidence on select Triumph cutters.

Comprehensive SCS safety package: patented EASY CUT electronic blade activation bars for true two-hand operation; IR light beam safety curtain on front table; safety cover on rear table; main switch and safety lock with key; 24 volt controls (low voltage); patented IDEAL safety drive; automatic blade and clamp return from every position; disc brake for instant blade stop; blade changing device covers cutting edge of blade; blade depth adjustment from outside of machine; blade and cutting stick can be changed without removing covers. Hydraulic clamp drive. Foot pedal for pre-clamping. Electric back gauge drive with touchpad control module for easy programming. Digital measurement display (cm or inches) with multilingual operator guidance, accurate to 1/10 mm or 1/100 inch. Stores 99 programs with up to 99 steps in each (up to 15 repeat cuts can be integrated as a single step). Pre-programmed for standard paper sizes. Memory keys for repeat cuts (manual) and quick setting of frequently needed measurements. Automatic SET function for reference measurement and paper EJECT function with and without program mode. DELETE and INSERT mode for correcting and modifying programs. Automatic correction in case of back gauge displacement. Push buttons for fast back gauge movement (forward and reverse). Integrated calculator. Self-diagnostic system with error indication on display. Electric blade drive with solid steel carrier and adjustable guides. Electronic hand wheel with variable speed control for manual back gauge setting. Clamp pressure is fully adjustable between 550 and 4,400 psi. False clamp plate with optical indicator. Bright, LED optical cutting line. Standard air tables (front and rear). High quality, German HSS steel blade. Precision swing cut blade movement. All-metal construction. Includes easy-access tool holder and paper blocking tool. Optional side tables increase work surface.



WWW.MBMCORP.COM
TEL: 843-552-2700

WWW.IDEAL-MBM.COM
TEL: 800-387-2528



All technical data is approximate and subject to change. © MBM Corporation, 4/2023

VRCUT[™] Ready TRIUMPH[®] 7260



IR SAFETY CURTAIN

IR light beam safety curtain covers work area to ensure the highest level of operator safety.



ELECTRONIC HAND WHEEL

The electronic hand wheel, with infinitely variable speed control, is used for manual back gauge positioning.




EASY CUT BLADE ACTIVATION BARS

Patented EASY CUT blade activation bars ensure true, two-handed operation and allow blade and clamp to be activated independently.



LARGE 7" TOUCH PAD

Extremely convenient: Programmable control module for the power backgauge with multi-lingual touch pad. 99 programs with 99 steps in each program can be stored.

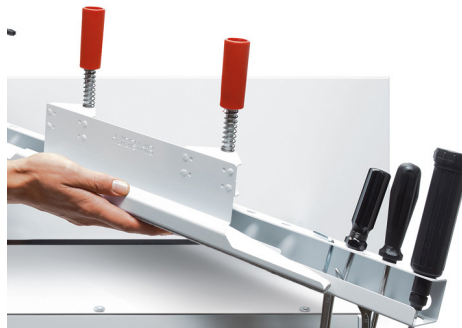

TOOL HOLDER

Convenient, drop-in tool holder is located on the rear of the machine and keeps all tools necessary for routine maintenance (including blade changes) within reach.



SAFE BLADE CHANGES

Blade changes can be made without removing machine covers. Handy blade changing device covers the cutting edge of blade.



VRCUT CONTROLLER HARDWARE KIT

Register on Lytrod.com to receive your free VRCut Hardware Kit. Everything you need, right out of the box.

VRCUT[™] by **LYTROD**[™] SOFTWARE

TWO MODULES, ONE INTEGRATED WORKFLOW

The VRCut solution consists of two independent modules that work together. The Impose module creates PDF documents formatted specifically to work with the VRCUT Controller module. The Controller module connects directly to the Triumph Cutter moving the back gauge and visually guiding operators through the cutting sequence.



WWW.MBMCORP.COM
TEL: 843-552-2700

WWW.IDEAL-MBM.COM
TEL: 800-387-2528



All technical data is approximate and subject to change. © MBM Corporation, 4/2023